

Sheerweave 3000



Description:

An attractive basketweave fabric suitable for internal use and cutting on the cross.

Key Features:

- Width: 2440mm Wide
- Suitable for: Roller, Roman & Panel Blinds, Internal Use, Cutting on Cross
- Colourways: 7
- Quality: Screen

Specification (1SW3):

- Composition: 35% Fibreglass / 65% PVC on Fibreglass, 31% Polyester / 69% PVC on Polyester
- Openness Factor: Approximately 14%
- UV Blockage: Approximately 86%
- Weave: Basketweave
- Fire Classification: Tested to AS 1530 Part II & Part III, BS 5867 Part II, Type B, NFPA 701 TM#1 Small Scale
- Nominal Thickness: 0.71mm
- Nominal Weight: 450 gsm
- Cutting: Ultrasonic, crush cut

Solar Optical Properties:

Fabrics installed internally thirty-degree profile angle

Style No.	Colour	Solar Optical Properties				Shading Coefficient	
		Ts	Rs	As	Tv	3mm CL	6mm CL
P01	Pearl White	24	62	14	20	0.38	0.38
Q01	Mushroom Sand	23	46	31	21	0.49	0.48
Q02	Custard Cream	24	52	24	22	0.45	0.44
Q04	Chocolate	14	5	81	17	0.75	0.71
Q17	Sand Dollar	26	40	34	24	0.54	0.52
V00	Dusty Grey	16	17	67	16	0.68	0.64
V01	Pale Grey	20	42	38	19	0.51	0.50

Ts: Solar Transmittance

Rs: Solar Reflectance

As: Solar Absorptance

Tv: Visual Transmittance

3mm CL: 3mm Clear Glass

6mm CL: 6mm Clear Glass


Manufactured: USA

Care:

Fabric should be regularly dusted / vacuumed as appropriate. May be wiped with warm water and mild detergent.

Warranty: 10 years

Colour Range *

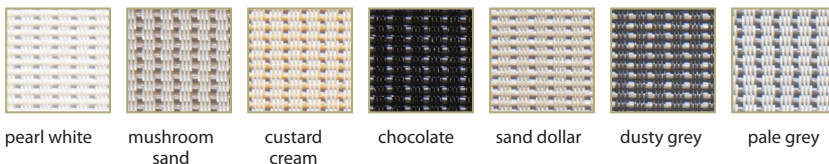

* colours representative only