

# Sheerweave 4500



**Description:**

A 2x2 basketweave 100% polyester screen fabric. Suitable for internal & external use. Available in two widths that can be cut on the cross.

**Key Features:**

Width: 2500mm / 3200mm Wide  
 Suitable for: Roller, Roman & Panel Blinds, Cutting on Cross, Internal & External Use  
 Colourways: 11  
 Quality: Screen

**Specification (1SW4):**

- Composition: 17% Polyester / 83% Vinyl on Polyester
- Openness Factor: Approximately 5%,
- UV Blockage: Approximately 95%
- Weave: Basketweave
- Fire Classification: Tested to AS 1530 Part II & Part III, BS 5867 Part II, Type B, NFPA 701 TM#1 Small Scale
- Nominal Thickness: 0.61mm
- Nominal Weight: 488 gsm
- Cutting: Ultrasonic, crush cut

**Solar Optical Properties:**

Fabrics installed internally thirty-degree profile angle

Style No.	Colour	Solar Optical Properties				Shading Coefficient	
		Ts	Rs	As	Tv	3mm CL	6mm CL
P06	White	12	74	14	11	0.26	0.27
P76	White Linen	13	62	25	13	0.35	0.35
P80	Ivory	14	65	21	14	0.33	0.34
P82	White Grey	10	49	41	11	0.44	0.43
P83	White Stone	12	61	27	12	0.36	0.36
QA3	Linen	10	47	43	11	0.45	0.44
QA6	Bronze	8	7	85	10	0.72	0.69
V10	Charcoal	5	3	92	7	0.74	0.70
V63	Charcoal Grey	7	10	83	10	0.70	0.67
V73	Grey	8	29	63	10	0.57	0.55
V75	Charcoal Bronze	7	5	88	9	0.73	0.70

Ts: Solar Transmittance      As: Solar Absorptance      3mm CL: 3mm Clear Glass  
 Rs: Solar Reflectance      Tv: Visual Transmittance      6mm CL: 6mm Clear Glass


**Manufactured:** Phifer China

**Care:**

Fabric should be regularly dusted / vacuumed as appropriate. May be wiped with warm water and mild detergent.

**Warranty:** 10 years interior use / 5 years exterior use

**Colour Range \***

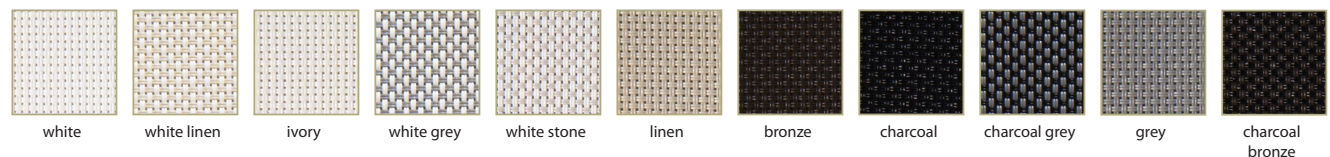

\* colours representative only